
accessories of middle-placed switchgear KYN28A-12(GZS1)

Dimension of 12kV Upside Shutter mechanism

5x S.320.012 (It's used for width 800mm switchgears)

5x S.320.012.1 (It's used for width 1000mm switchgears)

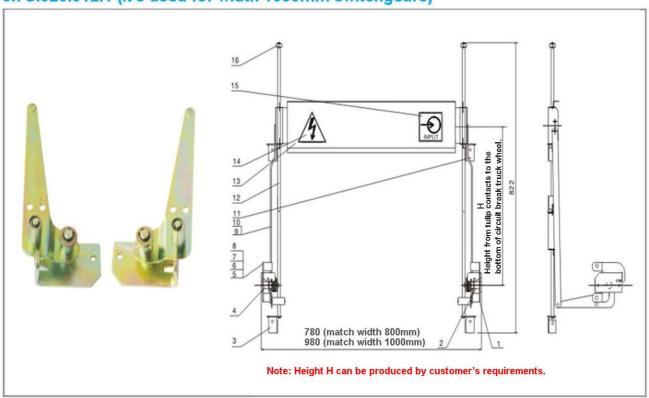

Accessories of 12kV Upside Shutter mechanism 5x S.320.012 and 5x S.320.012 .1

Item number	name	code	quantity piece/set	Item number	name	code
1	right support	8 x S.123.011	1	13	upper shutter (SMC or metal)	8xS.320.011 (match with width 800mm) 8xS.320.011.5 (match with width 1000mm
2 rig	ht connecting plat	e 8x S.174.004	1			
3	supporting plate	8x S.123.012	2			
4 le	ft connecting plate	8x S.174.003	1	14	direction board	8×S.866.012
5	washer 6	GB97.1-85	14	15	direction board	$8 \times S866.013$
6	elastic washer	GB93-87	8	16	limit bush	8x S.210.011
7	bolt $M6 \times 12$	GB5783-86	8	15	direction board	8 × S866.013
8	left support	8×S.123.011	1	16	supporting plate	8×S123.012
9	baffle plate	DK-8	4			
5XS.174.015.1 welding (H=535mm, match VD4-40kA) 10 connection of 5XS.174.015.2 connecting plates (H=465mm, match VD4-31.5kA) 5XS.174.015.3 (H=555mm, match VS1,TZNH)						
11	supporting plate	8x S.123.013	2			
12	shaft	8×S.234.011	2			

Note:



quantity piece/set